




## RJ-45 Modular Plug Series

網路水晶接頭 Serie de Tacos de enchufe modular RJ-45  
RJ-45モジュラープラグシリーズ

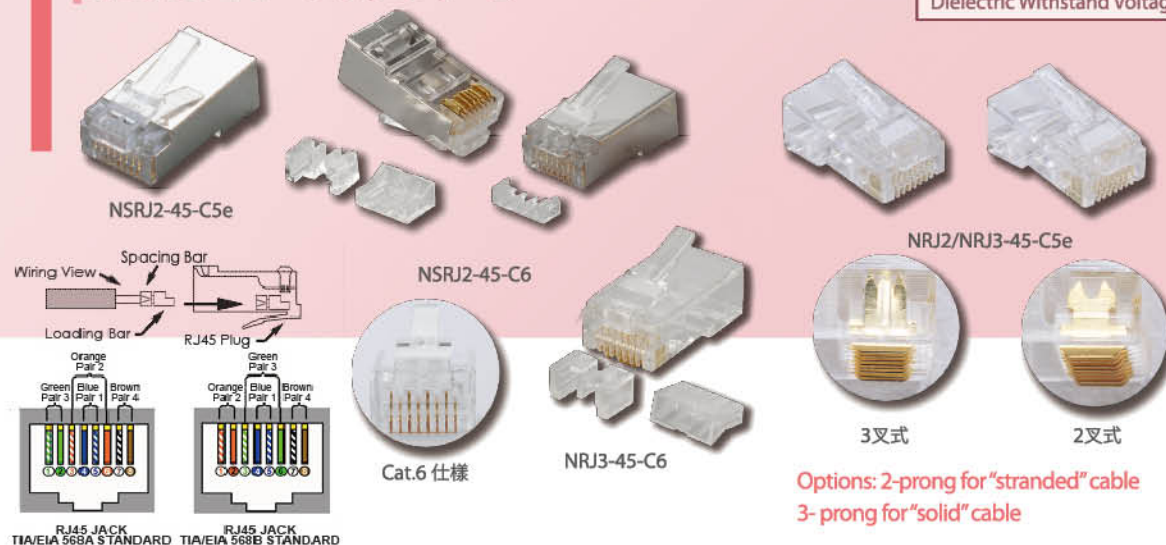

### Electrical Specifications

|                                        |
|----------------------------------------|
| Insulation Resistance: 500M.Ω          |
| Operating temperature: -40°C~+125°C    |
| Dielectric Withstand Voltage: 1,000VAC |

### 仕様

|                                      |
|--------------------------------------|
| ベリリウム銅表面:100 μニッケル層に100 μ金メッキ(Cat.6) |
| ベリリウム銅表面:100 μニッケル層に50 μ金メッキ(Cat.5e) |
| 抜き差し耐久:最低1,000回                      |
| UL®, CSA認定                           |

### RJ-45 Modular Plug Series: UTP typed

| Part Number | Description                                                                                                                        | Std. Pkg. Qty. |
|-------------|------------------------------------------------------------------------------------------------------------------------------------|----------------|
| NRJ2-45-C6  | Category 6, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-piece typed, for both solid and stranded cables) | 100            |
| NRJ3-45-C6  | Category 6, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (3-piece typed, for both solid and stranded cables) | 100            |
| NRJ2-45-C5e | Category 5e, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-prong, for stranded cable)                      | 100            |
| NRJ3-45-C5e | Category 5e, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (3-prong, for solid cable)                         | 100            |
| NRJ3-45-C5  | Category 5, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (3-prong, for solid cable)                          | 100            |

### Features

- Increased flexibility: use with stranded or solid cable
- Eight-conductor modular plug works with round cables
- Use with standard termination tools
- Load bar eases wire insertion while maintaining 1/2" twist requirements (12.7mm)

- 使用範囲廣：備有Cat.5、Cat.5e、Cat.6、無遮蔽、遮蔽式、單芯線（3叉）及多股線（2叉）多種組合型式
- 8支接觸針，其材質為鍍銅，以100 μ 鍍為底層、覆上純100 μ (Cat.6); 或100 μ 鍍為底層、覆上純50 μ (Cat.5e)鍍金處理
- 與所有市售壓接工具，完全相容
- 壓接容易，且壓接作業完成後，其對絞長度，均保持在規範1/2" 之內 (12.7 mm)

- Flexibilidad incrementada: se puede usar con cables sólidos o con los multihilo (stranded)
- Enchufe modular de ocho conductores trabaja con cables redondos
- Se usa con las herramientas estándares de terminación
- Barra de carga facilita la inserción de los conductores, mientras se mantienen los requerimientos de 1/2" de los twists

- 撚り線/単線に使用可能です
- 8芯丸断面のケーブルに使用します
- ベリリウム銅表面:100 μニッケル層に100 μ金メッキ(Cat.6); ベリリウム銅表面:100 μニッケル層に50 μ金メッキ(Cat.5e)です
- 特殊な工具は必要ありません
- かしめながら1/2インチ(12.7mm)の撚り状態を保ちます

### RJ-45 Modular Plug Series: FTP/STP typed

| Part Number  | Description                                                                                                                                  | Std. Pkg. Qty. |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| NSRJ2-45-C6  | Category 6 shielded typed, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-prong, for both solid and stranded cables)  | 100            |
| NSRJ2-45-C5e | Category 5e shielded typed, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-prong, for both solid and stranded cables) | 100            |