




Optional cable marker  
號碼環/ケーブルマーカー



Color options (Cat.5E):

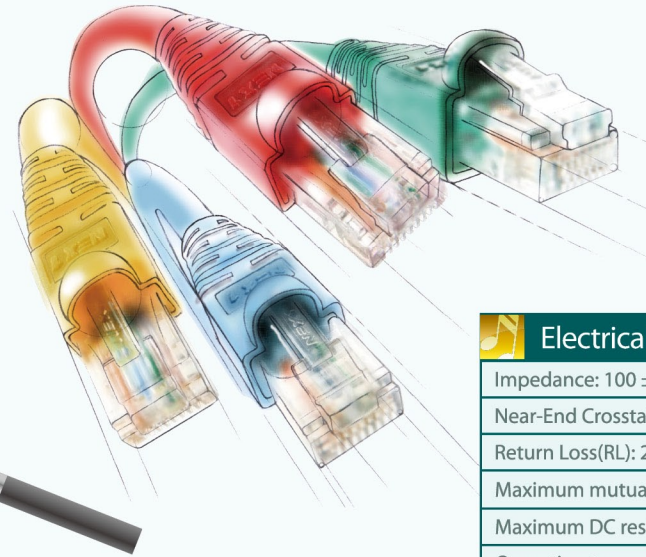


Color options (Cat.6):



Electrical Specifications	
Impedance:	100 ± 15Ω(1~ 100MHz)(Cat.5E)
Near-End Crosstalk (NEXT):	46 dB @ 100MHz
Return Loss(RL):	20.1dB @ 100MHz
Maximum mutual capacitance:	56pF/ m.
Maximum DC resistance:	9.38Ω/100m.
Operating temperature:	-20°C~ +75°C

**All color, all lengths, all the time!**  
各種長さ、多様顔色、当日出賃  
**¡Todos los colores, todos los largos, todo el tiempo!**  
さまざまな色や長さを即納

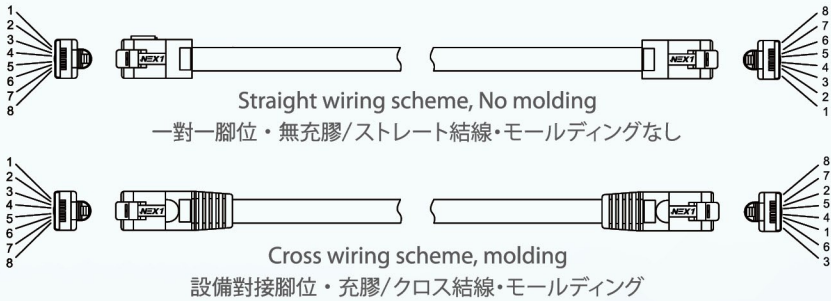

UTP/FTP/SFTP Patch Cords with Molded Boots: Category 6/5E		
Part Number	Description	Std. Pkg. Qty.
NPC-C6-@-*	Category 6 patch cord with molded boots on both ends	1
NPC-C5E-@-*	Category 5E patch cord with molded boots on both ends	1
NFPC-C6-@-*	FTP Category 6 foil-shielded patch cord with molded boots on both ends	1
NFPC-C5E-@-*	FTP Category 5E foil-shielded patch cord with molded boots on both ends	1
NSFPC-C6-@-*	SFTP Category 6 foil-shielded + braiding patch cord with molded boots on both ends	1
NSFPC-C5E-@-*	SFTP Category 5E foil-shielded + braiding patch cord with molded boots on both ends	1

length: @ / color : \*

Ready to be shipped, all the time!

- All colors shown above are in stock and ready for shipping anytime
- Standard lengths in stock are: 1, 2, 3, 5, 7, 10 and 15 meters
- Customized lengths, colors and wire schemes available
- 100% fully tested
- "@" mark stands for different digit for the lengths of the cords specified by the customers (30 stands for 30 meters; 50 for 50 meters etc.) while "\*" indicates the preferred color.

- 各種規格、標準長さ、随時備有充分庫存，以應客戶緊急需求
- 大量標準庫存長度：1、2、3、5、7、10、15米
- 可依客戶指定之特殊長度、顔色、及線位置身定做，交貨迅速
- 100%導通及特性測試保證
- "@" 為客戶所需之特殊長度。(例：30為30公尺；50為50公尺) "\*" 代表客戶指定之顔色
- Todos los colores mostrados arriba están disponibles en nuestro almacén y listos para su embarco a todo momento
- Los largos estándares en nuestro almacén son: 1, 2, 3, 5, 7, 10 y 15 metros

- Largos, colores y esquemas de alambres personalizados disponibles
- 全色とも十分に在庫があります
- 標準規格品は1m, 2m, 3m, 5m, 7m, 10m, 15mです
- 特注で長さ、色、結線の種類に対応できます
- 100%導通試験
- Cat.6, Cat.5E: UTP・STP・SFTP対応
- "@"は特注長(ご指定長)を示します
- "\*"は特注色(ご指定色)を示します

+886-2-2518-1300

