


# Category 5e Modular Patch Panel


超五類模組式跳接面板 | Paneles de conexión modular sin herramientas de la Categoría 5e  
カテゴリー5eモジュラーパッチパネル

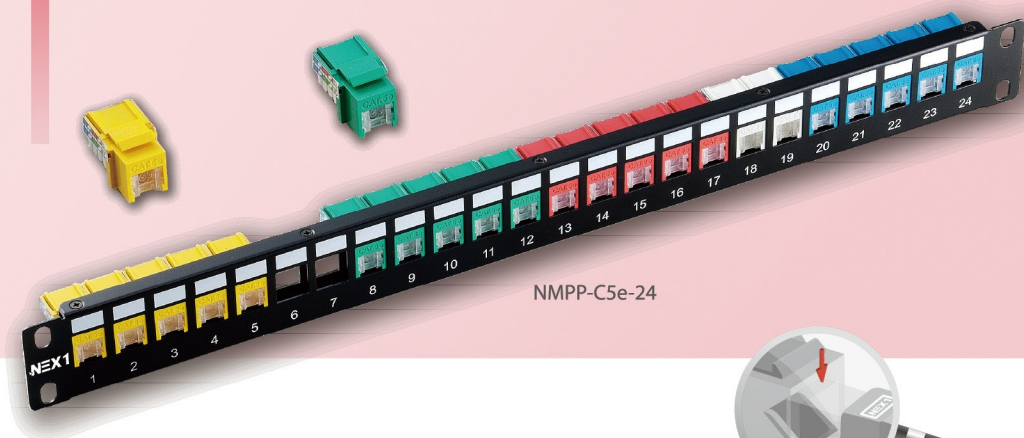

NMPP-C5e-24

## Features

- Supplied with 24 Category 5e Keystone jacks
  - High density group
  - Modular designed, each Keystone jacks can be installed or detached individually
  - Mounts to standard EIA 19" racks
  - A paired punch sequence allows a pair twist within 1/2" of termination
- 附24組Cat.5e資訊插座
  - 高密度排列
  - 模組化設計，每個資訊插座皆可單獨卡入或分別拆卸
  - 安裝於標準19" 機櫃
  - 每對線之對絞距離，均保持在1/2" (12.7mm)之內，符合Category 5e的安裝規範

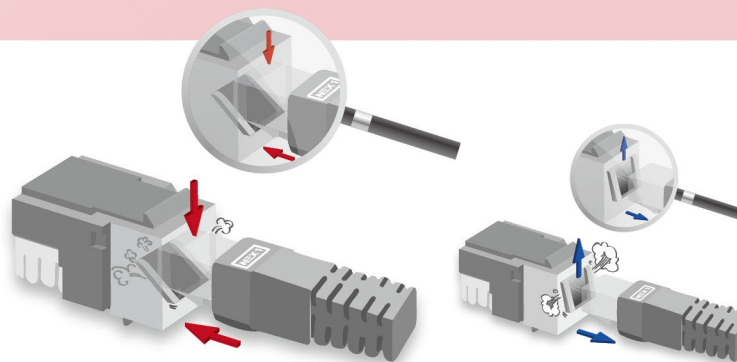

Smart dust cover  
智慧防塵蓋/スマート防塵カバー

- それぞれのキーストンジャックは脱着可能です
- 標準19インチラックに搭載可能です
- 圧着されている撚り戻しを1/2インチ(12.7 mm)以内に保つことができます

## Dimensions

No. of Port	SIZE	Wiring Schemes
24	4.6 cm (H) × 48.3 cm (W) × 4.1 cm (D) (1.8" × 19" × 1.6")	T568B/T568A

## Category 5e Modular Patch Panel

Part Number	Description	Std. Pkg. Qty.
NMPP-C5e-24	Cat. 5e, 24-port modular patch panel. Supplied with 24 Category 5e Keystone jacks	1

## Physical Specifications / 硬體規格

High-density 1U, 19" RMS (rack mount standard) design (24-port). Meets EIA-310-D 高密度1U、19"英吋，RMS標準機架設計(24埠)，符合EIA-310-D規格
UL-94V-0 high-impact, fire-retardant ABS material 採用UL-94V-0耐震、抗摔、滯燃性ABS塑鋼材質
Copper contacts: 50μ gold-plated pins over 100μ nickel layer 接觸針材質為磷青銅，以100-μ鎳為底層、覆上純50-μ鍍金處理
A pair punch sequence enables a pair twist within 1/2" of termination 壓接對絞之長度，均維持在1/2" Category 5e規範之內
Plug & jack contact force: 100g (Min.) 接頭接觸耐壓力：100g (Min)
Takes IDC: 22~26 AWG wires IDC可接受22~26AWG實心線
Operating temperature: -40°C ~ +80°C 使用溫度：-40°C ~ 80°C
FCC part 68, UL® certified FCC Part 68, UL®認證

## Electrical Specifications / 電氣特性

Insulation Resistance: 500M.Ω 絕緣電阻：500 M.Ω
Contact Resistance: 20m.Ω 接點阻抗：20m.Ω
Current rating: 1.5 Amps 額定電流：1.5 Amps
DC Resistance: 0.1Ω 直流電阻：0.1Ω
Dielectric Withstand Voltage: 1,000VAC RMS @60Hz/(1 Min.) 介電強度電壓：1000VAC RMS@60Hz/(1 Min.)

