


ROHS Compliant

DATE	2012/07/23
Revision	A

FEATURES :
 · PROVIDES TERMINATION FOR 22~26 AWG WIRE
 · JACK INSERTION LIFE >750 MATING CYCLES
 · IDC INSERTION LIFE >250 MATING CYCLES
 · OPERATING TEMPERATURE : -40°C ~ +60°C
 ELECTRICAL :
 · CONTACT RESISTANCE : 20M OHM
 · DC CURRENT RATING : 1.5AMPS
 · DC RESISTANCE : MAX.0.1 OHM
 · INSULATION RESISTANCE : 500M OHM
 · DIELECTRIC WITHSTANDING VOLTAGE : 1000V

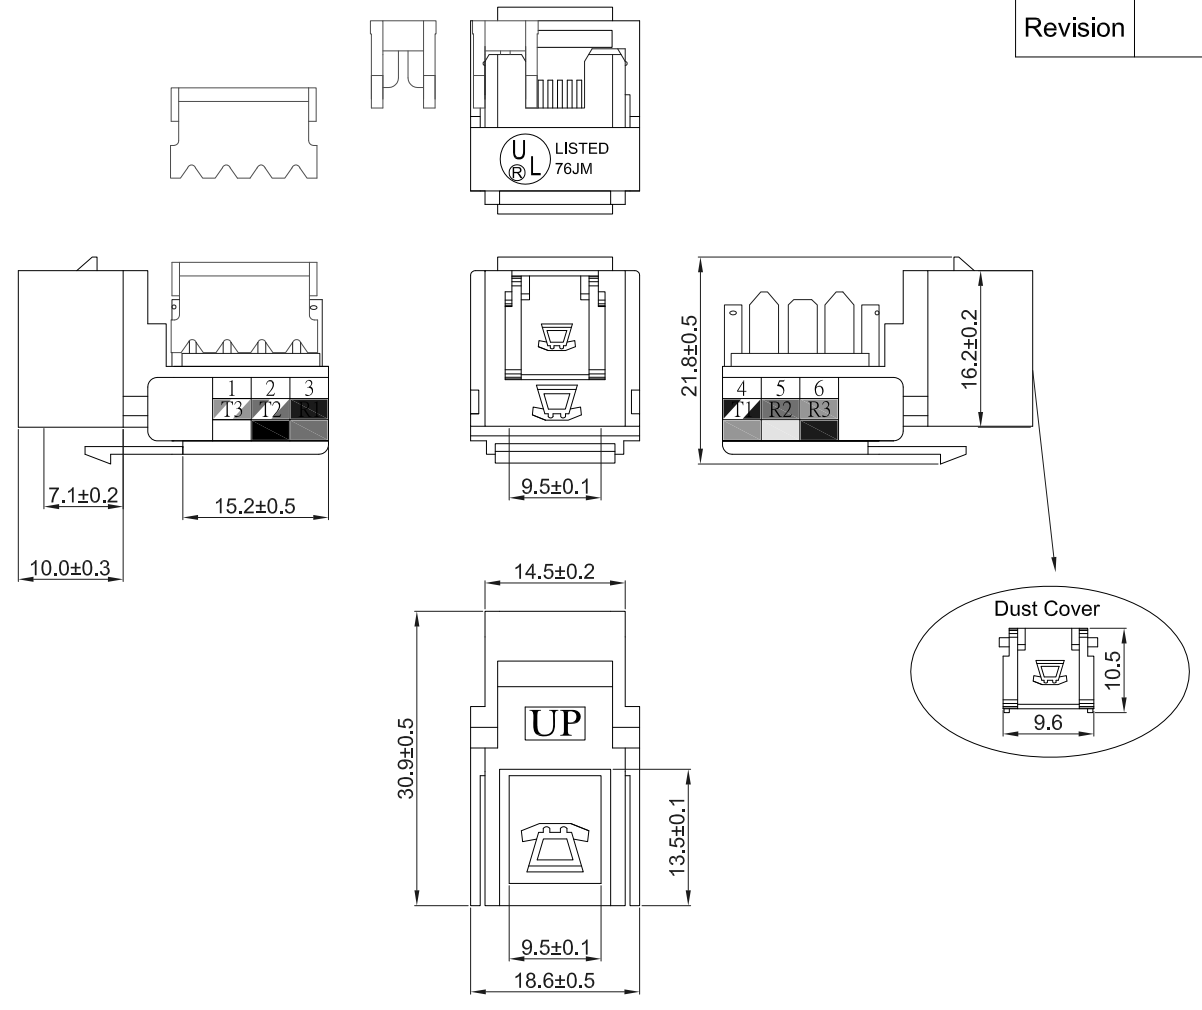

TOLERANCE	
.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

MATERIAL	
CATEGORY	<input type="checkbox"/> CAT.5E <input type="checkbox"/> CAT.6 <input checked="" type="checkbox"/> CAT.3 <input type="checkbox"/> OTHER _____
HOUSING	ABS UL94V-0
CONTACT	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	<input type="checkbox"/> 0.0762um/3u inch <input type="checkbox"/> 0.15um/6u inch <input type="checkbox"/> 0.38um/15u inch <input type="checkbox"/> 0.76um/30u inch <input type="checkbox"/> 1.27um/50u inch
COLOR	<input type="checkbox"/> WHITE <input type="checkbox"/> BLACK <input type="checkbox"/> GREEN <input type="checkbox"/> BLUE <input type="checkbox"/> YELLOW <input type="checkbox"/> RED <input type="checkbox"/> ORANGE <input type="checkbox"/> IVORY <input type="checkbox"/> OTHER _____
TYPE OF PRODUCT	<input checked="" type="checkbox"/> UNSHIELD <input type="checkbox"/> SHIELD : 0.25mm THICKNESS COPPER ALLOY WITH NICKLE PLATED.

P/NO. NKSJ-TEL		
ITEM.	CO. SY	S/N. NKSJ-TEL
DR. Wakka 2012/07/23	APPD.	CHKD.
NEX1 Technologies Co., Ltd TEL: (02) 2518-1300 FAX: (02) 2501-4209		FILE. NKSJ-TEL SCALE /
REV.	DESCRIPTION	UNIT mm SIZE A4