REV.	DATE	REMARK	ECN NO.	NAME
A		RELEASE		

Multi piece

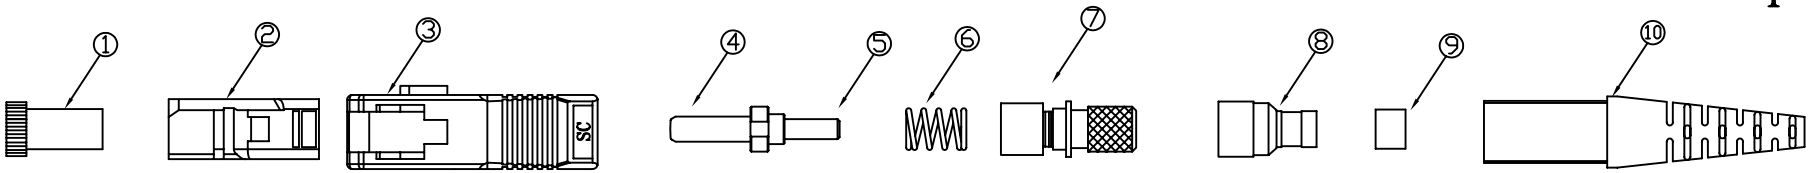

One piece



SM Specifications (@1310nm)
Insertion loss: 9/125um 0.3dB MAX.
Return loss:
>=45dB PC Polishing
>=50dB SPC Polishing
>=55dB UPC Plishing
Durability (500matings): 0.2dB Max.increase
Operating temperature: -20˚C ~ +70°C
Storage temperature: -40°C ~ +80°C

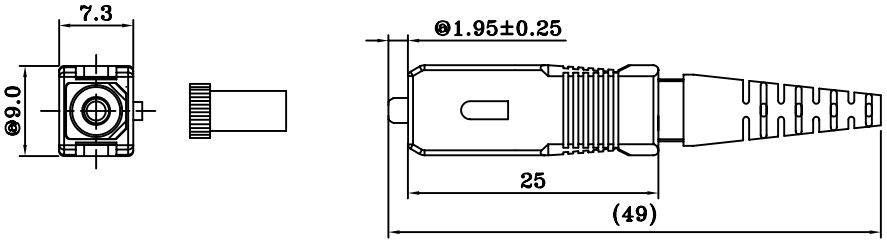

NO	Descriptions	Material	Q'ty
10	SC 2.0mm Boot	PP+TPR	1
9	Ring/Tube	Cu-Ni/Polyolefin	1
8	FC/SC 2.0mm Crimp	Al	1
7	Holder	Cu-Ni	1
6	Spring	Stainless	1
5	Flange 8mm	Cu-Ni	1
4	S.M. Ferrlue PC	Ceramic	1
3	Housing	PBT	1
2	Nut	PBT	1
1	Dust Cap	PE	1

▽ :Critical Dim
@ :Major CAV

Tolerances
0. ±0.50
0.0 ±0.20
Angle ±2°

PART NAME	SC SM Connector 2.0mm		
DRAWN BY	William	DRAWING NO.	
CHECKED BY		DRAWING SIZE	A4
APPROVED BY	Lion	UNIT	mm
		PAGE	