


Performance & Specifications	
Fiber Type	Single-mode
Connector Type	FC / LC
Insertion Loss	<math>< 0.3\text{dB}</math>
Return Loss (Typical)	55dB
Temperature Stability	<math>< 0.3\text{dB}</math>
Operating Temperature °C	-40°C ~ +80°C
Storage Temperature °C	-55°C ~ +85°C

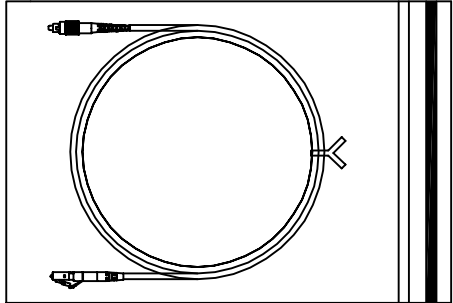

**PACKAGE:**  
One Piece / 7# Zipper bag

TOLERANCES		APPROVED.		<h2 style="text-align: center;">NEX1 Technologies CO.,LTD.</h2>			
.X	±0.1	CHECKED.					
.XX	±0.05			Title. SM FC/PC – LC/PC 2.0 Simplex MATERIAL. COATING. SCALE. Date. Rev. Sheet.			
.XXX	±0.005						
	±0.5°	DESIGNED.		Q' TY.	UNIT.	mm	SCALE.

1 2 3 4 5