


Performance & Specifications	
Fiber Type	Single-mode
Connector Type	SC / LC
Insertion Loss	<math><0.3</math>dB
Return Loss (Typical)	55dB
Temperature Stability	<math><0.3</math>dB
Operating Temperature °C	-40°C~+80°C
Storage Temperature °C	-55°C~+85°C

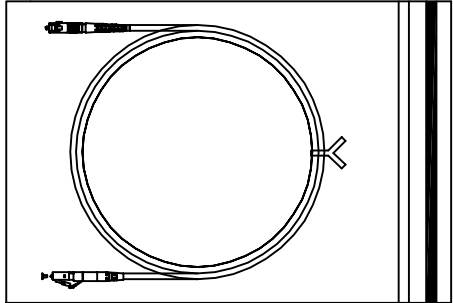

PACKAGE:
One Piece / 7# Zipper bag

TOLERANCES		APPROVED.		<h2 style="text-align: center;">NEX1 Technologies CO.,LTD.</h2>			
.X	±0.1	CHECKED.	DESIGNED.				
.XX	±0.05	✓		MATERIAL.			
.XXX	±0.005			Q' TY.			
	±0.5°			UNIT.	mm	SCALE.	Date.

1 2 3 4 5