


ROHS Compliant

DATE	2012/7/20
Revision	A

A

Features :


- T-568A/B Dual wiring
- RJ45 complies with FCC part 68 standard
- 110/Krone dual IDC connector compatible
- Provides termination for 22~26 AWG wire
- Jack insertion life >750 mating cycles
- IDC insertion life >250 mating cycles
- Operating temperature : -40°C~+60°C

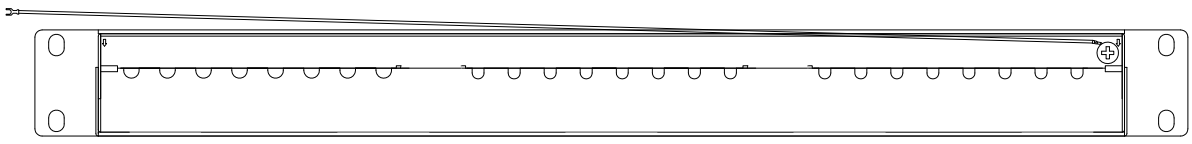

B


Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max.0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V

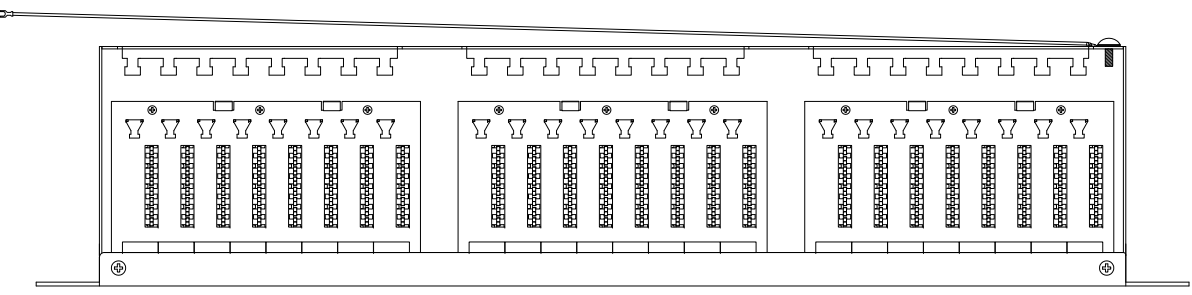


C

Grounding Wire

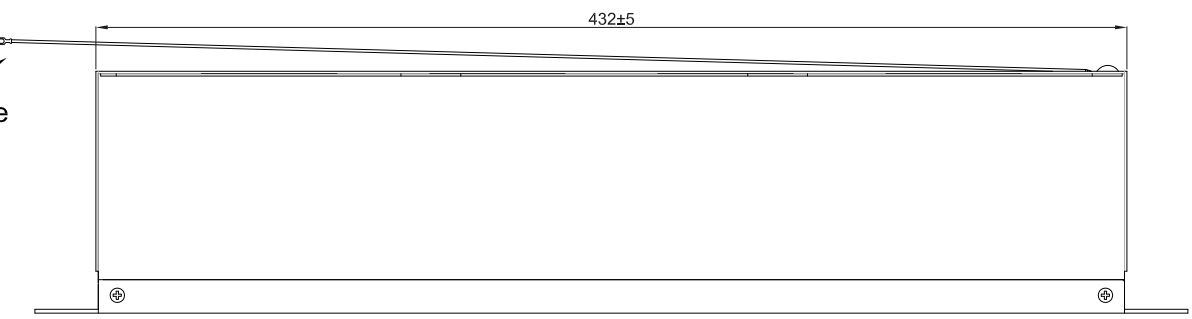

D

TOLERANCE	
.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

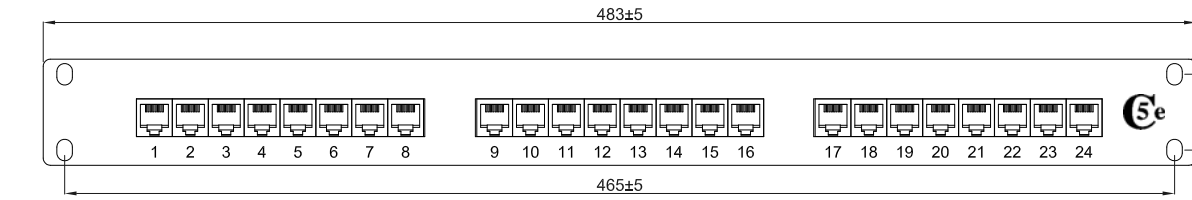

E

MATERIAL	
CATEGORY	<input checked="" type="checkbox"/> CAT.5E <input type="checkbox"/> CAT.6 <input type="checkbox"/> CAT.3 <input type="checkbox"/> OTHER _____
FRAME	METALLIC SPCC
IDC PLASTIC	PC, UL 94-V0
IDC CONTACT	PHOSPHOR BRONZE WITH 200U" TIN OVER NICKEL
CONTACT	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	<input type="checkbox"/> 0.0762 um / 3u inch <input type="checkbox"/> 0.15 um / 6u inch <input type="checkbox"/> 0.38 um / 15u inch <input type="checkbox"/> 0.76 um / 30u inch <input checked="" type="checkbox"/> 1.27 um / 50u inch
TYPE OF PRODUCT	<input type="checkbox"/> UNSHIELD <input checked="" type="checkbox"/> SHIELD : STAINLESS COVER

P/NO. NFPP-C5e-24					
ITEM. Patch Panel	CO. SY				
DR. Wakka 2012/07/20	APPD.				
NEX1 Technologies Co., Ltd TEL: (02) 2518-1300 FAX: (02) 2501-4209					
FILE. NFPP-C5e-24	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>SCALE /</td> <td></td> </tr> <tr> <td>UNIT mm</td> <td>SIZE A4</td> </tr> </table>	SCALE /		UNIT mm	SIZE A4
SCALE /					
UNIT mm	SIZE A4				