



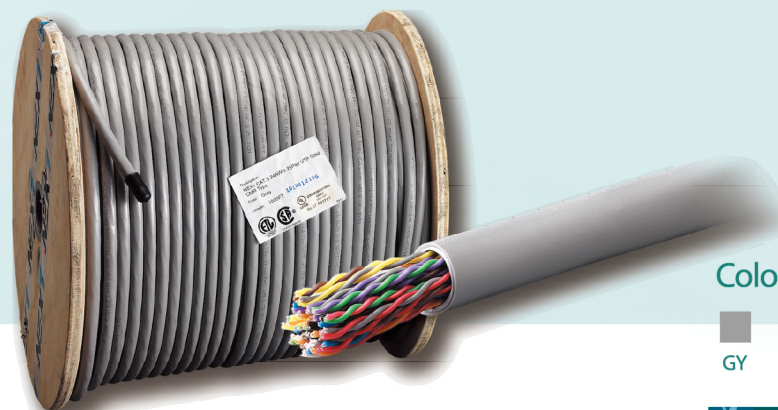

25-pair Category 5 UTP Cable (Solid)

五類25對線 | Cable UTP de la Categoría 5 de 25 pares (sólido) | 25 - ペア カテゴリ-5 UTP ケーブル (単線)

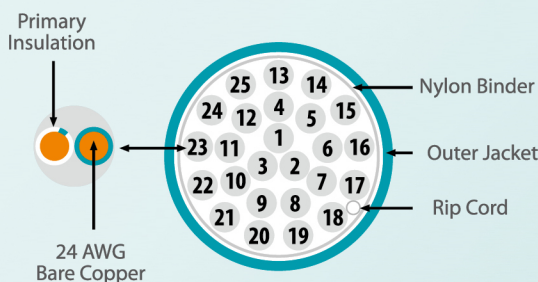

NUTP-C5-25P

Color options:



Features

- Pull one trunk cable and get 25 unshielded twisted pairs (up to six 4-wire sets with one pair spare)
- 100% ETL verified. Fully compatible with TIA/EIA-568B.2 requirements
- UL®/CSA listed CM, CMR, CMP
- 一次施工，便可同時完成，25對線的配線作業（相當於六組4對線，及1對備用線）
- 傳輸性能，真正達到100MHz
- 100%ETL認證，符合TIA/EIA-568B.2標準
- UL®/CSA認證，符合CM、CMR、CMP等級
- 1本のケーブルで25ペア無シールド単線（4対最大6ペア分）です
- 100%ETL認定。TIA/EIA-568B.2準拠
- UL/ CSA, CM, CMR, CMP準拠

25-pair Category 5 UTP Cable (Solid)

Part Number	Description	No. of Pairs	Standard Jacket Colors	Diameter (mm/inch)	Weight / Length	Std. Pkg. Qty.
NUTP-C5-25P	25-Pair Category 5 unshielded twisted pair(UTP) cable	25	Grey	13.0/0.51	69.3 Kg./ 304.8m. (152.7 lb./ 1,000 ft.)	1 (wooden reel)

仕様 / 硬體規格

FR-PVC被覆 / FR-PVC外被結構

ケーブルタイプ：25対無シールド単線ケーブル

纜線種類：25対無遮蔽式對絞單芯線

許容曲げ半径：直径の8倍 / 最小彎曲半径：總直径 × 8

絶縁：HDPE, FRPE, 100% FEP / 絶縁：HDPE、FRPE、100% FEP

銅線規格：24 AWG、軟銅線 / 導體：24AWG、單芯鍊銅材質

動作温度：-20℃~+75℃ / 使用温度：-20℃~+75℃

Electrical Specifications

Impedance: 100 ± 15Ω(1~ 100MHz)

Performance rating: Up to 100MHz

Maximum mutual capacitance: 56pF/m.

Maximum DC resistance: 9.38Ω/100m.

Maximum DC resistance unbalance: 5%

Maximum capacitance unbalance (pair to ground): 330 pF/ 100m.

Maximum Propagation delay skew: 45 ns/ 100 m.

Normal velocity of propagation: 62% @ 100MHz



02-2518-1300