




RJ-45 Modular Plug Series

網路水晶接頭 Serie de Tacos de enchufe modular RJ-45
RJ-45モジュラープラグシリーズ

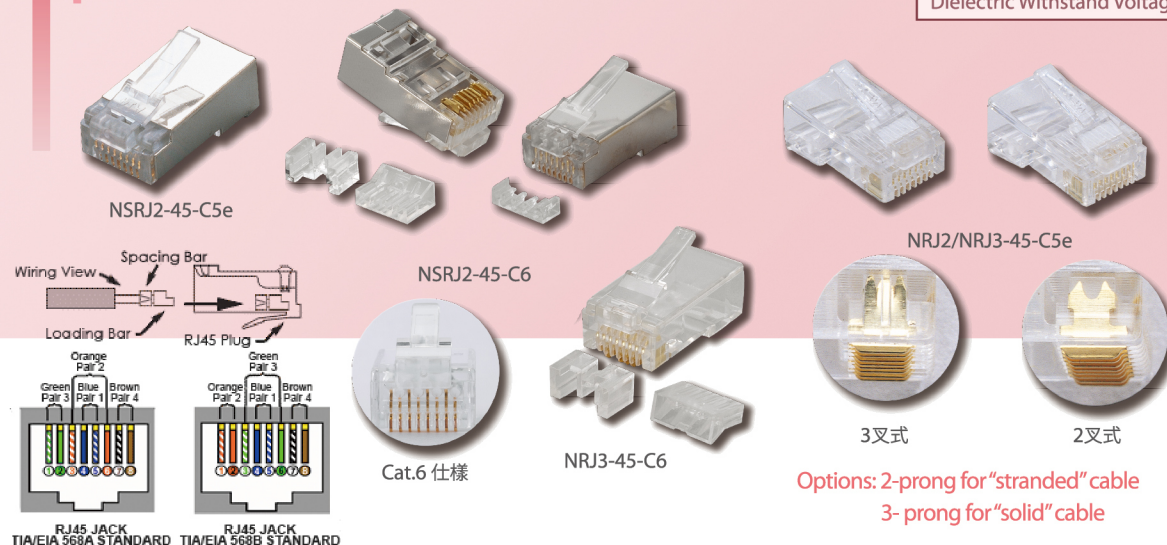

Electrical Specifications

Insulation Resistance: 500M.Ω
Operating temperature: -40℃~+125℃
Dielectric Withstand Voltage: 1,000VAC

仕様

接点ベリリウム銅:100 μニッケル層に50 μ金メッキ (Cat.6)
接点ベリリウム銅:100 μニッケル層に50 μ金メッキ (Cat.5e)
耐久挿抜回数: 最低1,000回
UL®, CSA認定

RJ-45 Modular Plug Series: UTP typed

Part Number	Description	Std. Pkg. Qty.
NRJ2-45-C6 (単線/撚り線)	Category 6, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-piece typed, for both solid and stranded cables)	100
NRJ3-45-C6 (単線/撚り線)	Category 6, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (3-piece typed, for both solid and stranded cables)	100
NRJ2-45-C5e (撚り線)	Category 5e, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-prong, for stranded cable)	100
NRJ3-45-C5e (単線)	Category 5e, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (3-prong, for solid cable)	100
NRJ3-45-C5 (単線)	Category 5, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (3-prong, for solid cable)	100

Features

- Increased flexibility: use with stranded or solid cable
- Eight-conductor modular plug works with round cables
- Use with standard termination tools
- Load bar eases wire insertion while maintaining 1/2" twist requirements (12.7mm)

- 使用範圍廣：備有Cat.5、Cat.5e、Cat.6、無遮蔽、遮蔽式、單芯線（3叉）及多股線（2叉）多種組合型式
- 8支接觸針，其材質為鍍銅，以100 μ 鎳為底層、覆上純50 μ (Cat.6); 或100 μ 鎳為底層、覆上純50 μ (Cat.5e) 鍍金處理
- 與所有市售壓接工具，完全相容
- 壓接容易，且壓接作業完成後，其對絞長度，均保持在規範1/2" 之內 (12.7 mm)

- Flexibilidad incrementada: se puede usar con cables sólidos o con los multihilo (stranded)
- Enchufe modular de ocho conductores trabaja con cables redondos
- Se usa con las herramientas estándares de terminación
- Barra de carga facilita la inserción de los conductores, mientras se mantienen los requerimientos de 1/2" de los twists

- 撚り線/単線
- 8芯丸断面のケーブルに対応
- 接点ベリリウム銅: 100 μニッケル層に50 μ金メッキ (Cat.6); ベリリウム銅表面: 100 μニッケル層に50 μ金メッキ (Cat.5e)
- 特殊な工具は必要ありません
- かしめながら1/2インチ (12.7mm) の撚り状態を保ちます

Options: 2-prong for "stranded" cable
3-prong for "solid" cable

RJ-45 Modular Plug Series: FTP/STP typed

Part Number	Description	Std. Pkg. Qty.
NSRJ2-45-C6 (単線/撚り線)	Category 6 shielded typed, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-prong, for both solid and stranded cables)	100
NSRJ2-45-C5e (単線/撚り線)	Category 5e shielded typed, 8-position, 8-wire RJ-45 modular plug. Featuring tangle-free latch (2-prong, for both solid and stranded cables)	100