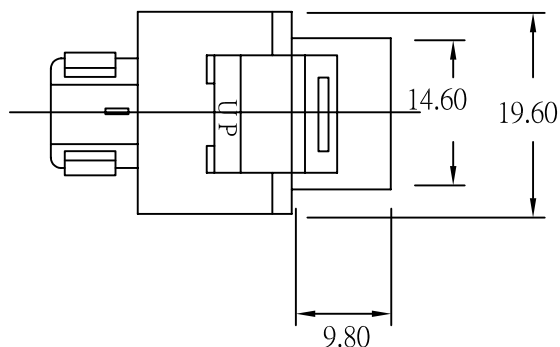


ELECTRICAL

UL APPLICATIONS: 250 VOLTSAC
MAX.AT 2 AMPS.


DIELECTRIC WITH STANDING VOLTAGE:
500 VOLTS AC.

INSULATION RESISTANCE:500 MEGOHMS.
TERMINATION RESISTANCE:35 MILLIOHMS
MAX.AFTER ENVIRONMENTAL TESTING.

(1)Materials:PC+ABS UL94V0

(2)RJ45Jack Contact:Phosphor
bronze,50u"gold plating in contact
area.

(3)Cavity conforms to FCC rules and
Regulations Part68

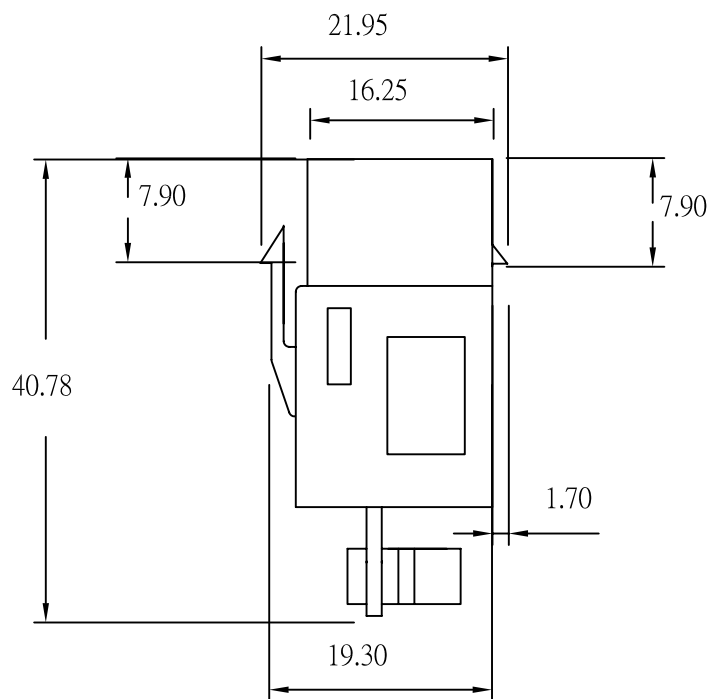

TECHNICAL DATA

HOUSING	STANDARD MATERIAL 15% GLASS FILLED PBT UL94V-0	GOLD-PLATING	0. 0.0762 um / 3u inch
	STANDARD COLOR : GRAY, BLACK		1. 0.15 um / 6u inch
CONTACT	0.46 DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL	GOLD-PLATING	2. 0.38 um / 15u inch
			3. 0.76 um / 30u inch
			4. 1.27 um / 50u inch

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------

TITLE

CO.

CLIE.

DR.

APPD.

CHKD.



NEX1 Technologies Co., Ltd

TEL: (02) 2518-1300

FAX: (02) 2501-4209

SCALE /

UNIT mm

SHEET

SIZE A4

REV.