


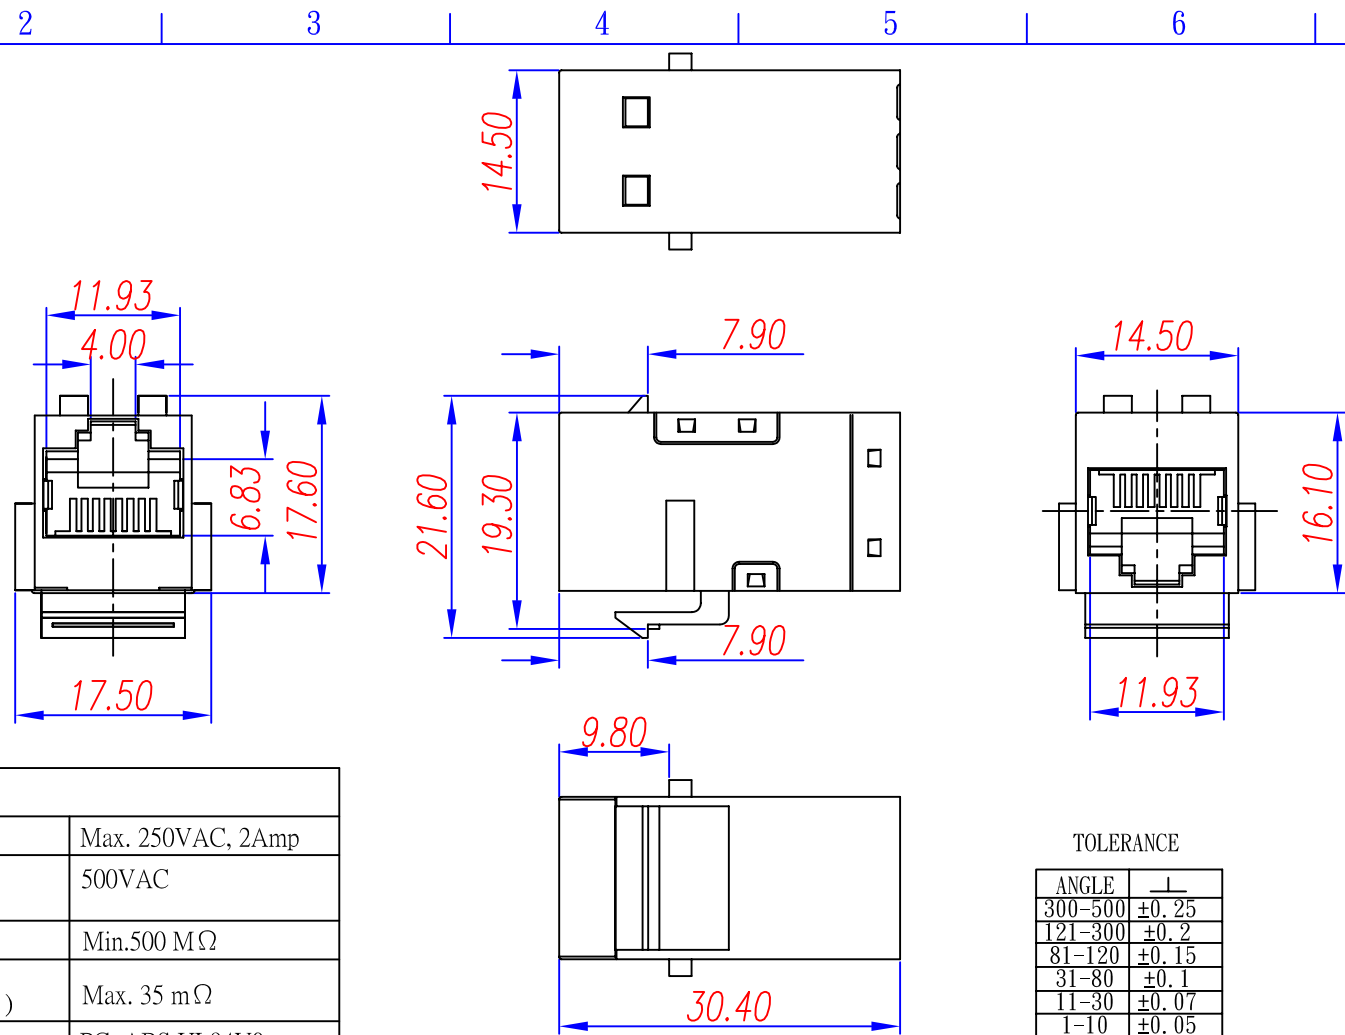

SPECIFICATION		
1	UL Applications	Max. 250VAC, 2Amp
2	Dielectrical with Standing Voltage	500VAC
3	Insulation Resistance	Min.500 MΩ
4	Termination Resistance (After Environmental Test)	Max. 35 mΩ
5	Material	PC+ABS UL94V0
6	RJ45 Jack Contact	Phosphor bronze, 50u" Gold Plating
7	Compliance	FCC Part 68

MATERIAL					ITEM. NWSI-C5E-SH	CO.	FILE.									
HOUSING	Standard - ABS Resin ☐ UL94V0 ☐ UL94V2			COLOR	☐ BLACK ☐ IVORY ☐ GRAY			DR.		APPD.	CHKD.					
CONTACT	0.46 mm Dia. Phosphor Bronze, Gold plating over Nickel										 NEX1 Technologies Co., Ltd TEL: (02) 2518-1300 FAX: (02) 2501-4209		SCALE	/		
OPTIONAL	☐ 6u inch ☐ 15u inch ☐ 30u inch ☐ 50u inch												UNIT	mm	SIZE	A4
													SHEET		REV.	
REV.	DESCRIPTION				ENG.	APPROVAL										
1	2		3		4		5		6		7					