

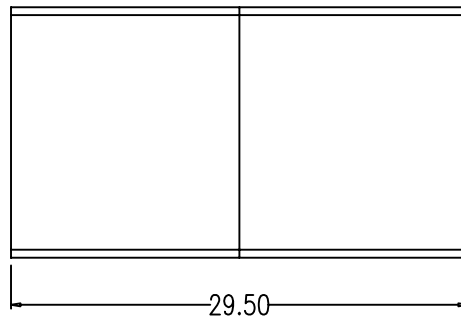



Date	2005/11/11
Revision	A

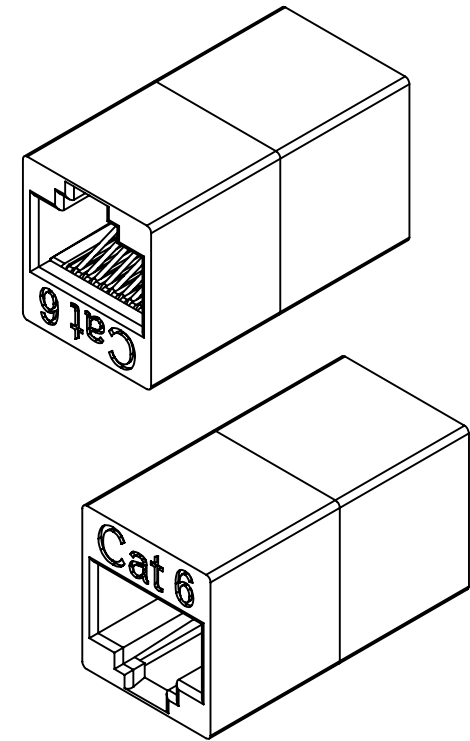

MATERIAL

Housing: ABS, UL 94V-0
 Spring Wire: Phosphor Bronze with 50u
 "Gold over 100u" Nickel undercoat
 Temperature: -40°C ~ 68°C
 Humidity: 10% ~ 90% RH
 Modular jack: 750 mating cycles

ELECTRICAL

Current rating: 1.5 Amps
 Insulation resistance: 500 MΩ
 Contact resistance: 20 mΩ
 DC resistance: 0.1 Ω
 Dielectric withstanding voltage: 1000 V

P/NO. NJJ-C6

TOLERANCE	
.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------

ITEM. Keystone Jack	CO. SH5224	FILE. NJJ-C6
DR. Hansum2005/11/11	APPD.	CHKD.
 NEX1 Technologies Co., Ltd TEL: (02) 2518-1300 FAX: (02) 2501-4209		SCALE / 
		UNIT mm SIZE A4
		SHEET REV.