



Date	2005/12/19
Revision	A

A

A

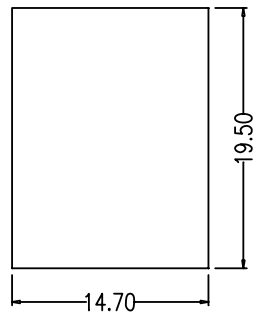

Suggested Panel Cutout



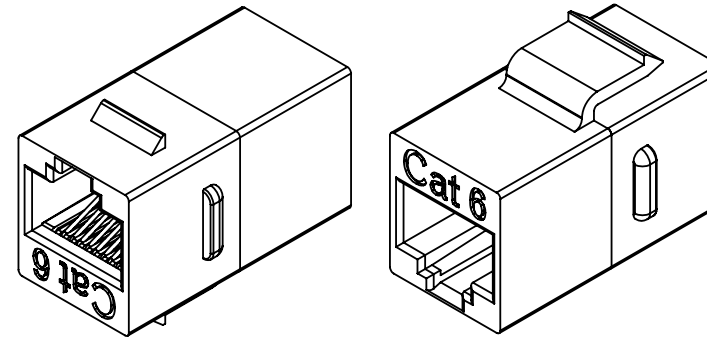


B

B

C

C

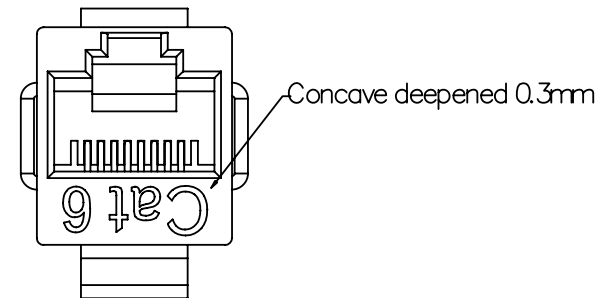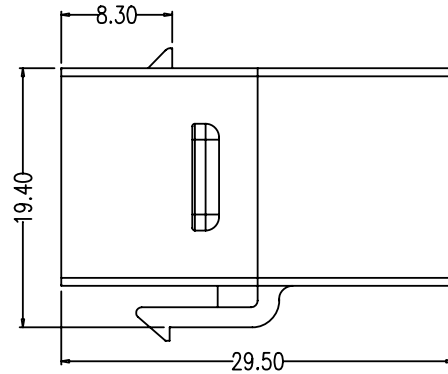

D

D

MATERIAL
Housing: ABS, UL 94V-0
Spring Wire: Phosphor Bronze with 50u"
Gold over 100u" Nickel undercoat
Temperature: -40°C ~ 68°C
Humidity: 10% ~ 90% RH
Modular jack: 750 mating cycles

ELECTRICAL
Current rating: 1.5 Amps
Insulation resistance: 500 MOhm
Contact resistance: 20 mOhm
DC resistance: 0.1 Ohm
Dielectric withstanding voltage: 1000 V


P/NO. NJJ-C6-N

TOLERANCE	
.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

E

E

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------

ITEM Keystone Jack	CO.	FILE NJJ-C6-BK	
DR. Hansum2005/11/02	APPD.	CHKD.	
 NEX1 Technologies Co., Ltd TEL: (02) 2518-1300 FAX: (02) 2501-4209		SCALE /	
		UNIT mm	SIZE A4
		SHEET	REV.

1

2

3

4

5

6

7