


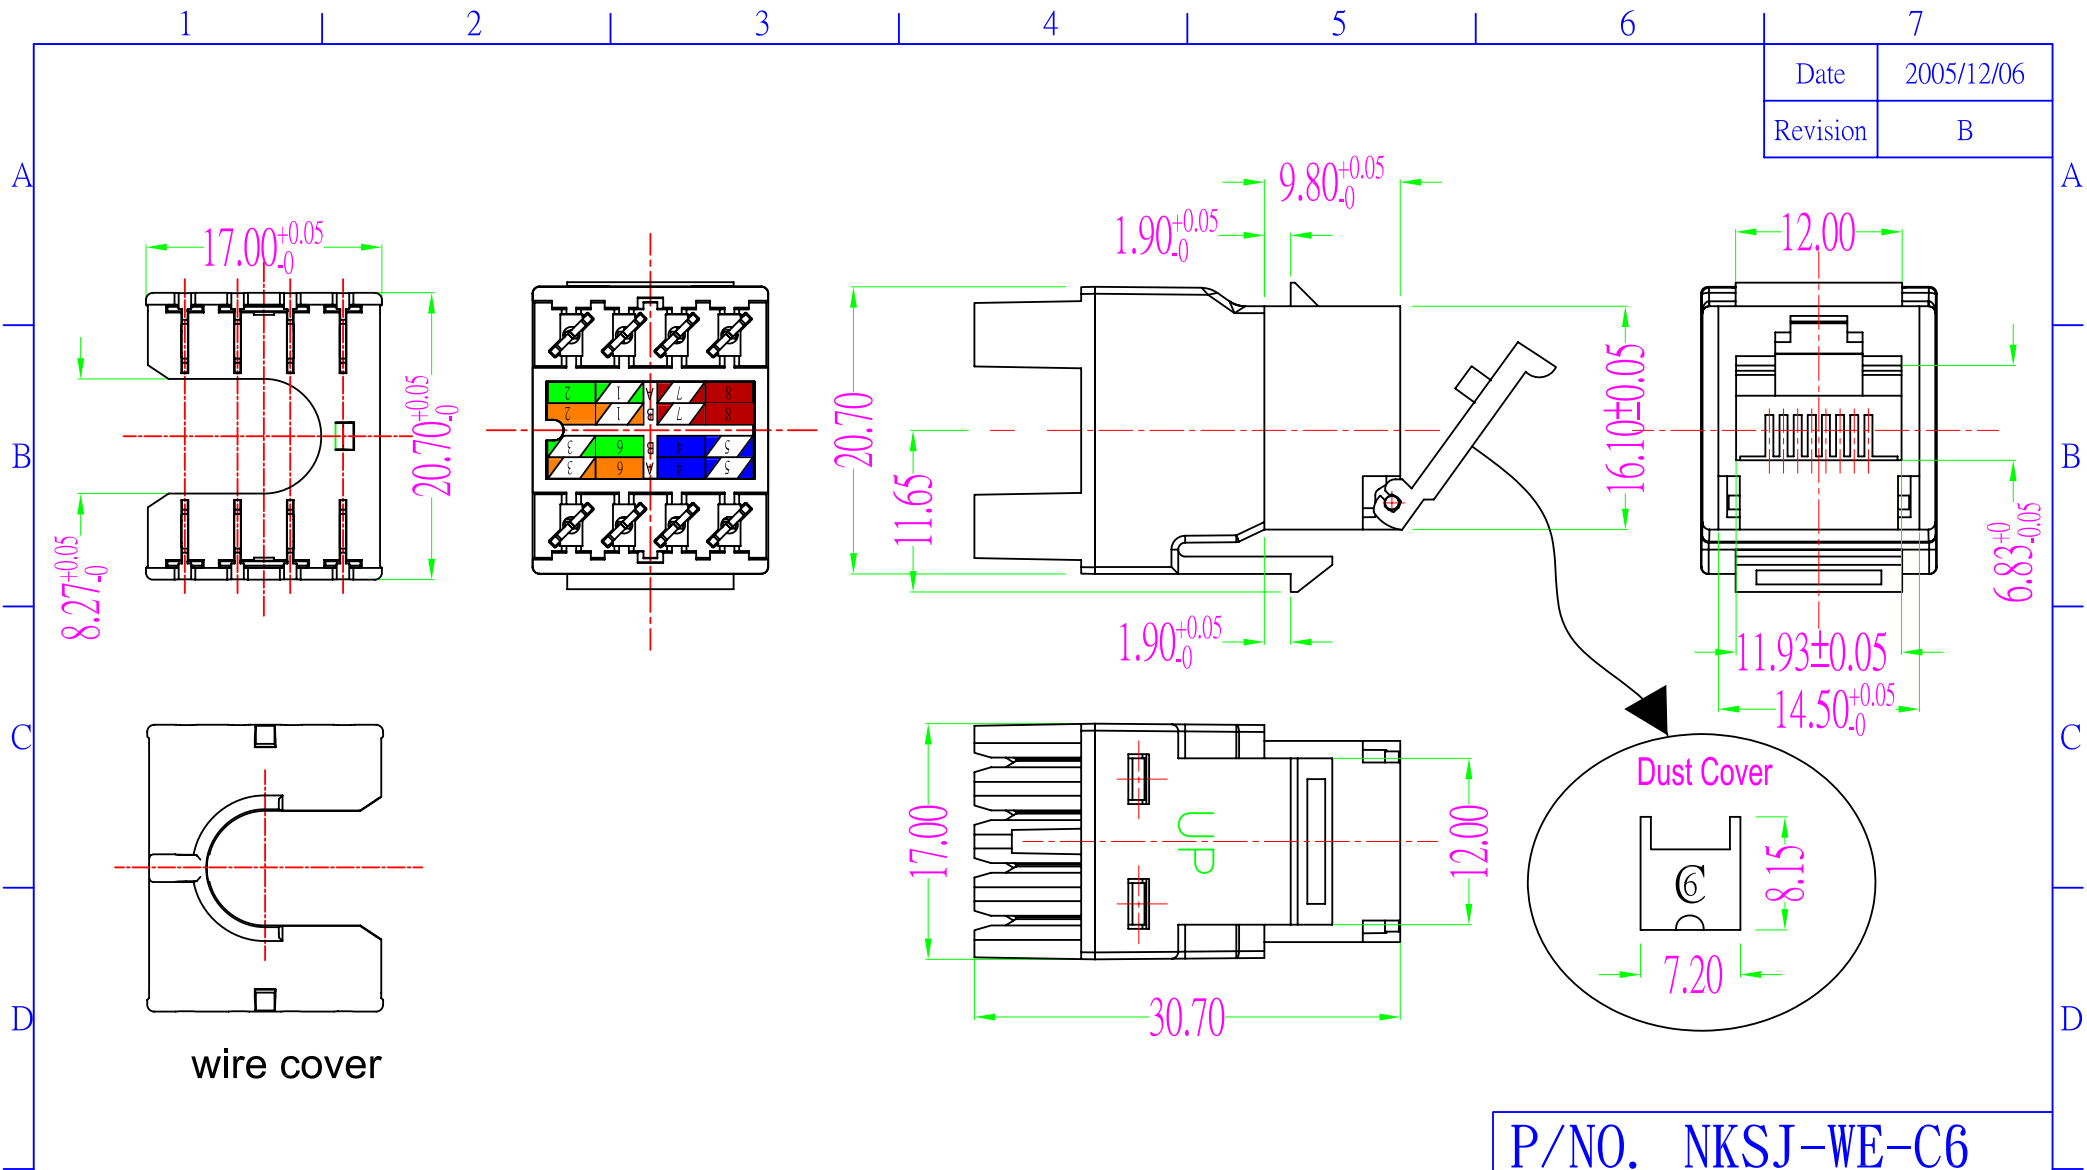

SPECIFICATION				ANGLE	$\perp$	P/NO. NKSJ-WE-C6	
1	UL Applications	Max. 250VAC, 2Amp		301-500	±0.25	ITEM. KEYSTONE JACK	CO. SH5224
2	Dielectrical with Standing Voltage	500VAC		121-300	±0.2	DR. Hansum 2005/12/06	FILE. NKSJ-WE-C6
3	Insulation Resistance	Min.500 MΩ		81-120	±0.15	APPD.	CHKD.
4	Termination Resistance (After Environmental Test)	Max. 35 mΩ		31-80	±0.1	NEX1 Technologies Co., Ltd TEL: (02) 2518-1300 FAX: (02) 2501-4209	
5	Material	PC+ABS UL94V0		11-30	±0.07		
6	RJ45 Jack Contact	Phosphor bronze, 50u" Gold Plating		1-10	±0.05		
7	Compliance	FCC Part 68		TOLERANCE		SCALE /	
REV.	DESCRIPTION	ENG.	APPROVAL			UNIT mm	SIZE A4
1	2	3	4	5	6	SHEET	REV.