

Cable ID: E61LS-X021AX-0620


Test Summary: PASS

Date / Time: 06/20/2003 09:05:20am
Headroom: 8.2 dB (NEXT 45-78)
Test Limit: TIA Cat 6 Perm. Link
 Cable Type: UTP 100 Ohm Cat 6
 Fault Anomaly Threshold: 15%



Operator: Your Name
 Software Version: 1.906
 Limits Version: 5.12
 NVP: 69.0%
 Shield Test: N/A

Model: DSP-4300
 Main S/N: 8305006
 Remote S/N: 8305006
 Main Adapter: PM- 001
 Remote Adapter: PM- 001



Wire Map	1 2 3 4 5 6 7 8 S
PASS	
	1 2 3 4 5 6 7 8





Length (ft), Limit 295	[Pair 12]	293
Prop. Delay (ns), Limit 498	[Pair 36]	455
Delay Skew (ns), Limit 44	[Pair 36]	24
Resistance (ohms)		N/A
Attenuation (dB)	[Pair 36]	2.1
Frequency (MHz)	[Pair 36]	247.0
Limit (dB)	[Pair 36]	30.9

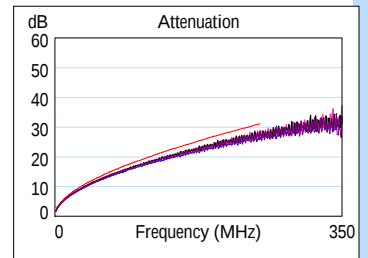



	Worst Case Margin		Worst Case Value	
PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	45-78	12-36	36-78
NEXT (dB)	8.8	8.2	9.0	8.8
Freq. (MHz)	162.5	14.0	246.5	245.5
Limit (dB)	38.4	55.6	35.4	35.4
Worst Pair	36	36	36	36
PSNEXT (dB)	8.7	8.8	9.5	8.9
Freq. (MHz)	19.0	245.0	245.5	246.0
Limit (dB)	51.1	32.9	32.8	32.8

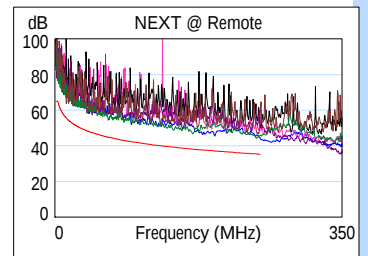



PASS	MAIN	SR	MAIN	SR
Worst Pair	45-78	36-45	45-78	45-78
ELFEXT (dB)	4.1	4.1	4.1	4.1
Freq. (MHz)	234.0	120.5	234.0	234.0
Limit (dB)	16.8	22.5	16.8	16.8
Worst Pair	45	45	45	45
PSELFEXT (dB)	6.5	5.4	7.0	5.4
Freq. (MHz)	120.5	233.5	241.0	233.5
Limit (dB)	19.5	13.8	13.5	13.8

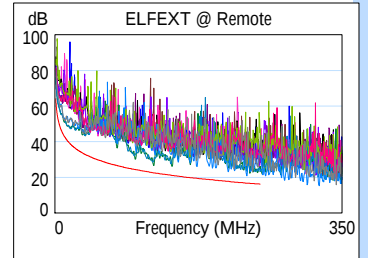

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	45-78	12-36	12-36
ACR (dB)	9.8	8.8	11.2	11.8
Freq. (MHz)	18.9	14.0	247.0	250.0
Limit (dB)	45.8	49.0	4.5	4.2
Worst Pair	36	36	36	36
PSACR (dB)	9.1	9.5	12.1	11.1
Freq. (MHz)	18.9	22.2	247.0	247.0
Limit (dB)	43.5	41.6	1.9	1.9

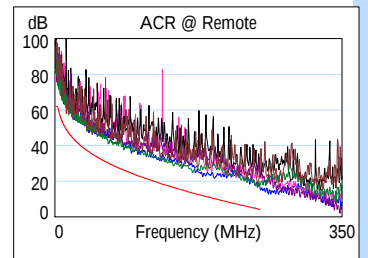

PASS	MAIN	SR	MAIN	SR
Worst Pair	12	12	78	78
RL (dB)	5.3	6.0	11.1	11.9
Freq. (MHz)	3.8	3.8	239.0	240.0
Limit (dB)	21.0	21.0	10.2	10.2

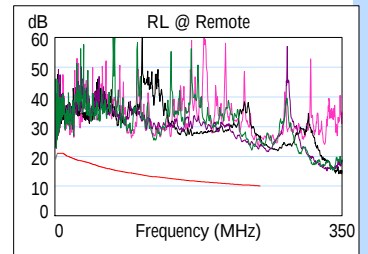

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T ATM-25 ATM-51
 ATM-155 100VG-AnyLan TR-4
 TR-16 Active TR-16 Passive