

19" SERVER RACK

K/D [Knocked-down] Server Racks ship more to a container

FEATURES


- Meet ANSI / EIA RS-310-C,D,E,F, ETSI/IEC-297-3 regulations, UL and CE approvals, also the MIL-STD-167 vibration test is compatible perfectly.
- Max. static load : 1014kgw
(tested by SGS, Report No : HLO0195B/2004)
- Easy setup and disassemble
- Die-cast heavy duty aluminum post frame
- Side panels, top, bottom plates of SPCC high-quality cold roll steel.
- Plexiglass front door , ventilate Rear door W/lock
- Removable side, front and rear doors
- Adjustable Aluminum mounting angle

MATERIAL

- Die-cast heavy duty aluminum post frame
- Side panels, top cover, bottom plates of SPCC high-quality cold roll steel

INSTALLATION DIMENSION

- Height (External) :
15 HU / 20 HU / 25 HU / 30 HU / 35 HU / 41HU / 42HU
{1 HU (or 1U) = 44.45 mm}
- Depth (External) : 615 / 750 / 900mm
- Width (Installed) : 482 mm (19" design, External Width: 600mm)

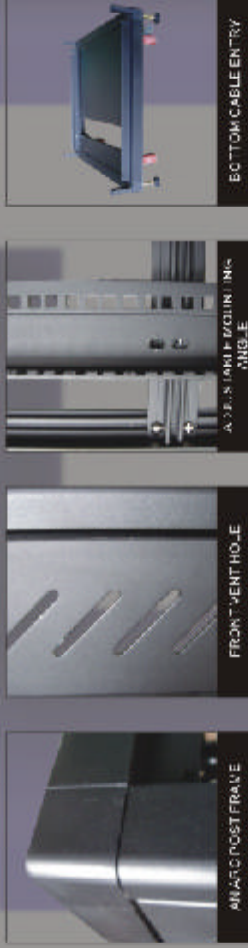

19" SERVER RACK

STANDARD SIZE & PACKING INFO.


19" Server Rack Standard W(external) = 600 Unit=mm

Standard Size

Packing info. for Container

Model No.	H(internal)	H(internal)	D(internal)	D(external)	Q'ty/20' CTR	Q'ty/40' CTR
15U SJF-15-615	667	747	529	615	100	223
20U SJF-20-615	889	969	529	615	89	220
25U SJF-25-615	1111	1191	529	615	80	179
30U SJF-30-615	1334	1414	529	615	72	163
35U SJF-35-615	1556	1636	529	615	66	149
41U SJF-41-615	1822	1902	529	615	60	135
15U SJF-15-750	667	747	664	750	88	197
20U SJF-20-750	889	969	664	750	78	176
25U SJF-25-750	1111	1191	664	750	69	155
30U SJF-30-750	1334	1414	664	750	64	144
35U SJF-35-750	1556	1636	664	750	59	133
41U SJF-41-750	1822	1902	664	750	54	121
15U SJF-15-900	667	747	814	900	76	172
20U SJF-20-900	889	969	814	900	64	144
25U SJF-25-900	1111	1191	814	900	63	141
30U SJF-30-900	1334	1414	814	900	57	127
35U SJF-35-900	1556	1636	814	900	53	119
41U SJF-41-900	1822	1902	814	900	48	103

ASSEMBLE GUIDE

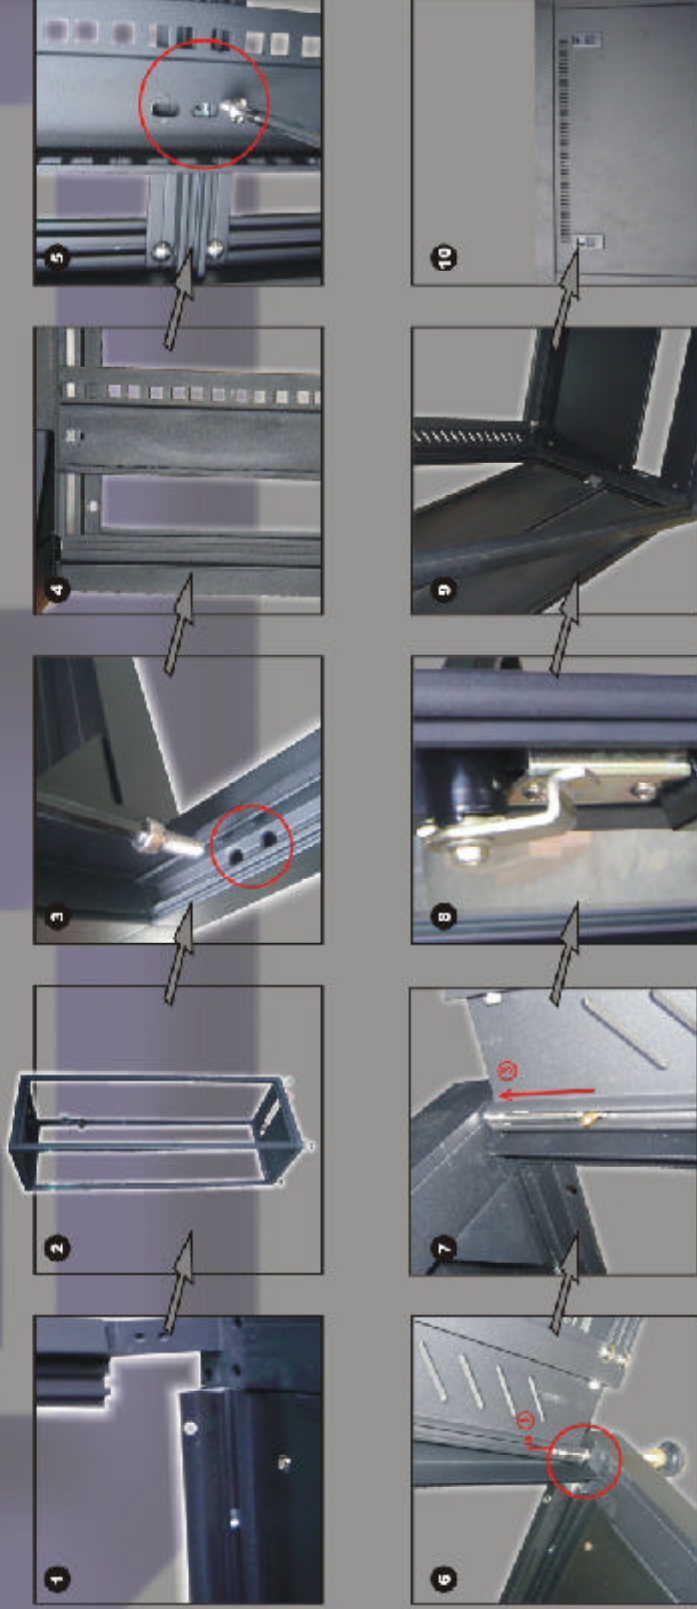

FOUR BOXES FOR ONE KIT PACK RACKS